


Product Code:

Description:

# X19 19" UK Horizontal Rack Mount PDU



List No.	Description
X194	4way 19" Horizontal Rack Mount
X195	5way 19" Horizontal Rack Mount
X196	6way 19" Horizontal Rack Mount
X198	8way 19" Horizontal Rack Mount

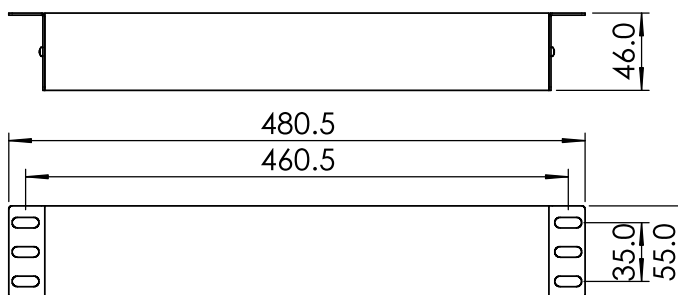

Compliance:	<ul style="list-style-type: none"> <li>- CE Compliant: 93/68/EEC</li> <li>- BS5773: 1995</li> <li>- BS1363-1: 1995</li> <li>- BS EN 60950: 2000</li> <li>- BS1363-2: 1995</li> <li>- IEC/EN 60320-2-2</li> <li>- IEC 60309-1 (BS4343)</li> </ul>
Materials:	<ul style="list-style-type: none"> <li>- Accessories: Polycarbonate</li> <li>- Body: Aluminium Extrusion: BS1474 (1987) Alloy 6063T6</li> <li>- Finish: Catagory 3 - Anodised Black</li> <li>- End Brackets: Mild Steel: CR4 BS10130: 1991</li> </ul>
Current:	<ul style="list-style-type: none"> <li>- 13Amps per Outlet</li> <li>- 16Amps Total Load with: UK Plug Top 16Amp BS4343 Plug IEC C14 Plug IEC C20 Plug</li> <li>- 32Amps Total Load with: 32Amp BS4343 Plug</li> </ul>
Voltage:	230 - 250V a.c.
Frequency:	50Hz
Connection Details:	<ul style="list-style-type: none"> <li>- 1.5mm<sup>2</sup> x 3Mtrs 3core HO5VV-F Flex to BS1363 Plug fused @13Amps, 16Amp BS4343 Plug, IEC C14 Plug, IEC C20 Plug via strain relief gland.</li> <li>- 4.0mm<sup>2</sup> x 3Mtrs 3core HO5VV-F Flex to 32Amp BS4343 Plug via strain relief gland.</li> </ul>
Box Quantity:	1 piece / 1.23Kgs(X198) / 0.0054M <sup>3</sup>
Environmental Issues:	<ul style="list-style-type: none"> <li>- Packaging Waste:</li> <li>Cardboard - 0.0015Kg / 125T/125T B Flute</li> <li>RoHS Compliant - ref: 2002/95/EC</li> <li>The products manufactured &amp; otherwise supplied by the company do not have any perceived or known hazardous materials or by-products that would be deemed hazardous to the environment.</li> </ul>